

A

B

C

D

E

F

A





B

C

D

E

F

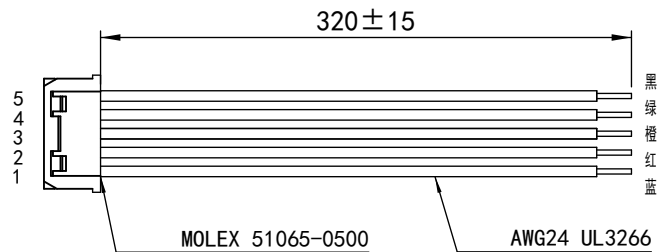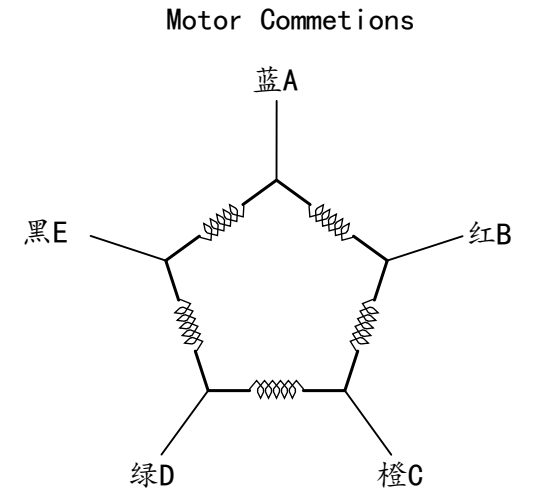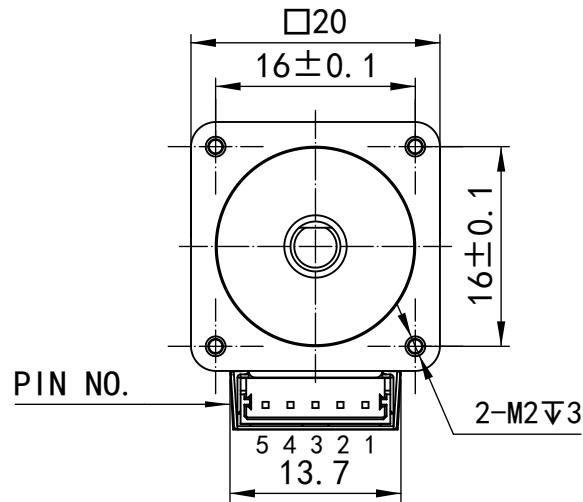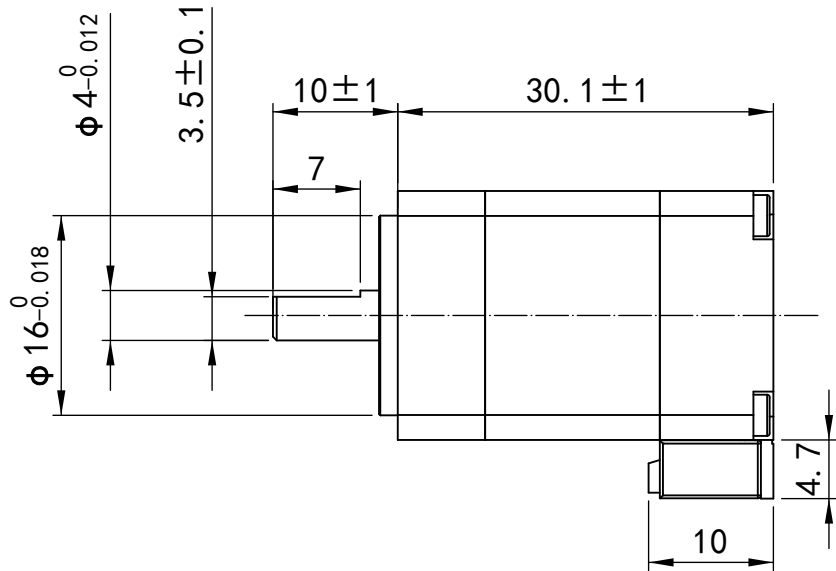

规格 Specifications

1.相数 Number of Phase	5
2.步距角 Step Angle	0.72°
3.额定电压 Rated Voltage	1.08V
4.额定电流 Rated Current	0.35A
5.保持力矩 Holding Torque	0.02N.M
6.相电阻 Phase Resistance	3.1ohm±10%
7.相电感 Phase Resistance	1.6mH±20%
8.转子惯量 Rotor Inertia	0.033/kg.cm ²
9.电机重量 Motor Weight	0.05KG
10.绝缘等级 Insulation Class	B(130℃)

			单位:毫米 Unit:mm 第一视角画法 First angle method  未注线性与角度尺寸公差均按 GB/T 1804-M 未注形状与位置尺寸公差均按 GB/T 1184-K	批准 Approve			 锐特技术 RTINTELLIGENT ChangZhou Rtelligent Motor Technology Co.Ltd 常州锐特电机技术有限公司	Hybrid Stepping Motor				
				标准化 Standard								
				工艺 Technology								
				审核 Check	ZHANG	2026/8/28		型号:	20CM002 V3.0			
				设计 Design				图号:				
	原始版本 Original revision											
REV.	版本记录 REVISION RECORD	DATE	UNLESS OTHERWISE SPECIFIED	NAMES	SIGNATURE	DATE	TYPE:			Rev.A	SCALE 1:1	Sheet 1 of 1