


图号/DWG NO.
86HSM78T-K1440-024



A schematic diagram of a 4-wire motor. It features a central circle labeled 'M' representing the motor. To the left of the motor, there are two terminals: the top one is labeled 'A+' with '红' (Red) above it, and the bottom one is labeled 'A-' with '蓝' (Blue) above it. To the right of the motor, there are two terminals: the top one is labeled 'B+' with '绿' (Green) below it, and the bottom one is labeled 'B-' with '黑' (Black) below it. Wavy lines connect the terminals to the motor: a line from A+ to the top of the motor, a line from A- to the bottom of the motor, a line from B+ to the right side of the motor, and a line from B- to the left side of the motor.

BINDER PLUG: 

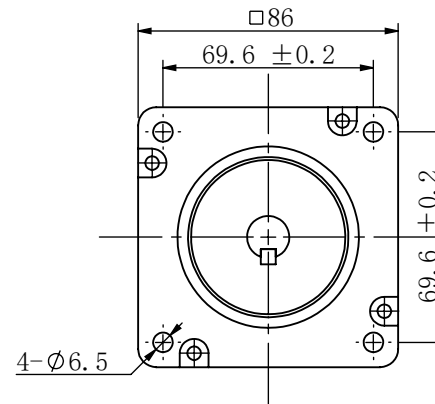

Pin	1	2	3	4	5	6
Definition	A+	A-	B+	B-	NC	NC
Color	RED	BLUE	GREEN	BLACK	BLACK	BLACK

	STEP	A+	B+	A-	B-
CW ↓	1	+	+	-	-
	2	-	+	+	-
	3	-	-	+	+
	4	+	-	-	+

↑
CCW

Pin	1	2	3	6	11	12	13
Definition	EA+	VCC	GND	PE	EB+	EB-	EA-
Color	BROWN	RED	BLUE		GREEN	YELLOW	WHITE

CONFIRMED&ACCEPTED BY COTUMER (客户确认&接受)								
COMPANY CHOP&SIGNATURE (盖章&签名)								
		2022-12-14						
一般公差 TOLERANCE $\pm 0.3/\pm 3^\circ$	版本 REV.	年 月 日 DATE	变更番号 ECR NO.	变 更 内 容 REVISIONS	设计 BY	备注 NOTE	REV.	A

设计/DESIGNED		比例 SCALE		型 号/MODEL 86AM45ED-HG	三维图 THIRD ANGLE PROJECTION
审核/CHECKED		单位 UNIT	mm		
深圳锐特机电技术有限公司				页 SHEET	1/1