


图号/DWG NO.
D57HSM86D-D0822-030

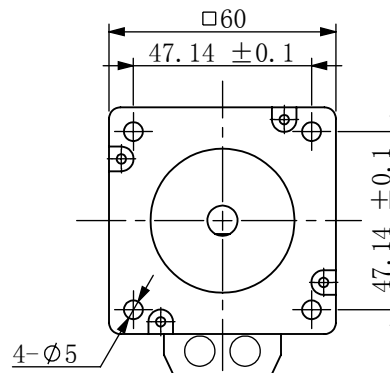


A schematic diagram of a 4-wire motor. It features a central circle labeled 'M' representing the motor. To the left of the motor, there are two terminals: the top one is labeled 'A+' with '红' (Red) above it, and the bottom one is labeled 'A-' with '蓝' (Blue) above it. To the right of the motor, there are two terminals: the top one is labeled 'B+' with '绿' (Green) above it, and the bottom one is labeled 'B-' with '黑' (Black) above it. The motor is connected to these terminals via four wires: two on the left and two on the right.

	STEP	A+	B+	A-	B-
1	+	+	-	-	
2	-	+	+	-	
3	-	-	+	+	
4	+	-	-	+	

已受控

1000线光电编码器出线定义									
序号	1	2	3	4	5	6	7	8	9
定义	EA+	EA-	NC	EB+	EB-	NC	NC	5V	GN
线色	棕	白	\	绿	黄	\	\	红	蓝

CONFIRMED&ACCEPTED BY CUSTOMER (客户确认&接受)									
		COMPANY CHOP&SIGNATURE (盖章&签名)							
一般公差 TOLERANCE	±0.3/±3°	版本 REV.	年 月 日 DATE	变更番号 ECR NO.	变 更 内 容 REVISIONS	设计 BY	备注 NOTE	REV.	A
设计/DESIGNED		比例 SCALE			型 号/MODEL D57AM30ED	三视图 THIRD ANGL PROJECTION 			
		单位 UNIT		mm					
审核/CHECKED		深圳锐特机电技术有限公司						页 SHEET	1/1