
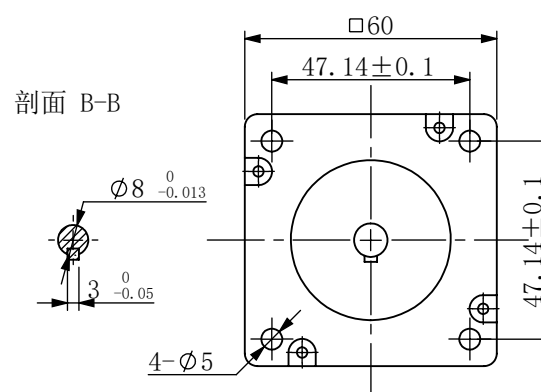


图号/DWG NO.
D57HS86-KC0833-059

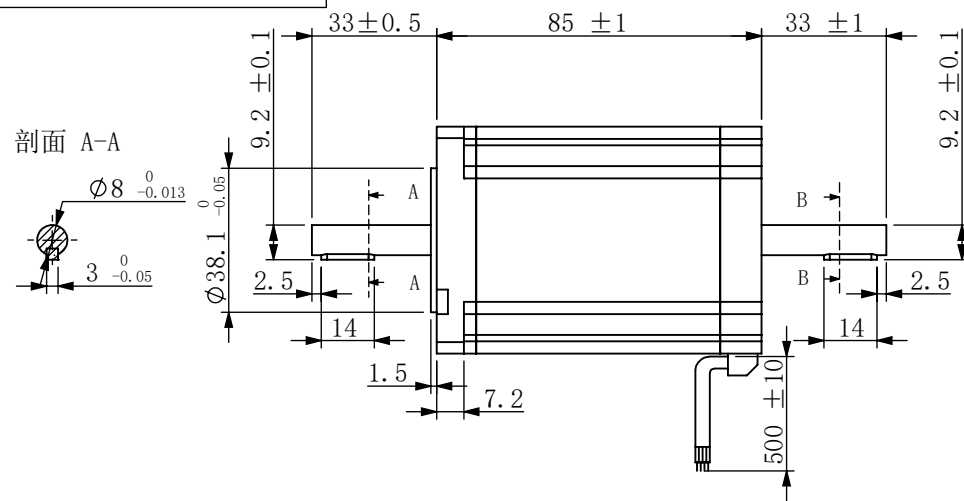


A schematic diagram of a four-terminal device. On the left, there are two input terminals: the top one is labeled '红 A+' (Red A+) and the bottom one is labeled '蓝 A-' (Blue A-). On the right, there are two output terminals: the top one is labeled 'B+ 绿' (B+ Green) and the bottom one is labeled 'B- 黑' (B- Black). A central circle containing the letter 'M' is connected to the top terminal (A+) and the bottom terminal (B-). A horizontal line connects the two bottom terminals (A- and B-).

步 距 角/STEP ANGLE	1.8° ±5%
相 数/NO. OF PHASES	2
额定电压/RATED VOLTAGE	2.5V
额定电流/RATED CURRENT	5.0A
电 阻/RESISTANCE	0.5ohm±10% AT25℃
电 感/INDUCTANCE	2.22mH±20% AT 1kHz, 1Vrms
保持力矩/HOLDING TORQUE	3.ON.m
运行力矩/(AT —PPS) RUNNING TORQUE(AT —PPS)	——以上/MIN (——V. DC, ——A/相(PHASE), ——相励磁/EX)
绝缘耐压/DIELECTRIC STRENGTH	500V A.C 1分钟/MINUTE
绝缘电阻/INSULATION RESISTANCE	100MΩ 以上/MIN.
绝缘等级/INSULATION CLASS	CLASS B
温度上升/TEMPERATURE RISE	80K MAX.
转子惯量/ROTOR INERTIA	690g. cm ²
重 量/WEIGHT	约/APPROX. 1394克/g
允许轴向负载/ALLOWABLE THRUST LOAD	5N
允许径向负载/ALLOWABLE RADIAL LOAD	30N(轴端/ON THE SHAFT END)
运行环境温度/OPERATION AMBIENT TEMP.	-20℃——+50℃
运行环境湿度/OPERATION AMBIENT HUM.	15%——90%

备注(NOTE):

1. 额定电流, 两相同时通电/AT RATED CURRENT, TWO PHASES ON.
2. 热阻法: 电机安装在84*84*15的铝板上, 电机线圈两端通额定电压, OPSS /MEASURED BY RESISTANCE METHOD. MOUNT WITH ALUMINUM HEAT SINK 84*84*15 AT TWO WINDING BE EXCITED BY RATED VOLTAGE, OPSS, 2PHASE ON.
3. 寿命测试条件: 整步, 运行速度为500PPS, 轴承的表面温度不超过70° C
LIFE TEST CONDITION: 2PHASE EXCITING, FULL STEP, AT 500PPS. STARTING PULSE, BEARING TEMPERATURE SHOULD BE 70° C MAX.



标签模板：

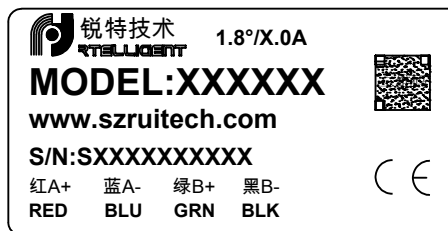

励磁顺序(2相励磁)VS. 旋转方向
EXCITING SEQUENCE(TWO PHESES)
VS. DIRECTION OF ROTATION

	STEP	A+	B+	A-	B-
<div style="display: flex; align-items: center;"> <div style="text-align: right; margin-right: 10px;">CW</div> <div style="flex-grow: 1; border-left: 1px solid black; position: relative;"> <div style="position: absolute; top: -10px; left: 0; right: 0; height: 10px; background: linear-gradient(to right, transparent 49%, black 49% 51%, black 51% 50%, transparent 50%);"></div> </div> <div style="text-align: left; margin-left: 10px;">CCW</div> </div>	1	+	+	-	-
	2	-	+	+	-
	3	-	-	+	+
	4	+	-	-	+

从安装面看为顺时针方向
CLOCKWISE VIEW FROM MOUNTING SIDE

CONFIRMED&ACCEPTED BY CUSTOMER (客户确认&接受)									
			2023.11.10						
一般公差 TOLERANCE	±0.3/±3°	版本 REV.	年 月 日 DATE	变更番号 ECR NO.	变 更 内 容 REVISIONS	设计 BY	备注 NOTE	REV. A	
设计/DESIGNED		比例 SCALE		型 号/MODEL D57AM30-33K-D				三维图 THIRD ANGL PROJECTION	
		单位 UNIT	mm						
审核/CHECKED		深圳锐特机电技术有限公司						页 SHEET	1/1