



图号/DWG NO.  
57HS102-K0830-013

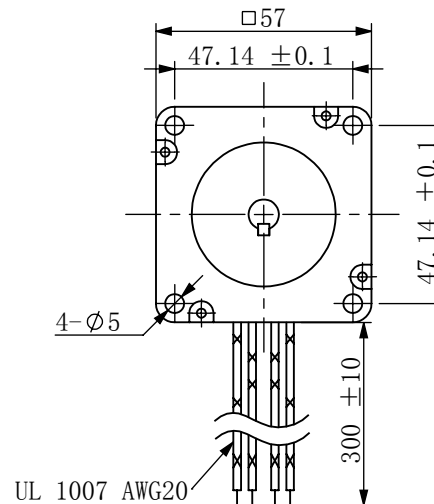


励磁顺序(2相励磁)VS. 旋转方向  
EXCITING SEQUENCE(TWO PHESES)  
VS. DIRECTION OF ROTATION

CW ↓	STEP	A+	B+	A-	B-
	1	+	+	-	-
	2	-	+	+	-
	3	-	-	+	+
	4	+	-	-	+
↑ CCW					

从安装面看为顺时针方向  
CLOCKWISE VIEW FROM MOUNTING SIDE

1. 额定电流, 两相同时通电/AT RATED CURRENT, TWO PHASES ON.  
2. 热阻法: 电机安装在84\*84\*75的铝板上, 电机线圈两端通额定电压, OPSS  
/MEASURED BY RESISTANCE METHOD. MOUNT WITH ALUMINUM HEAT SINK 84\*84\*75  
AT TWO WINDING BE EXCITED BY RATED VOLTAGE, OPSS, 2PHASE ON.  
3. 寿命测试条件: 整步, 运行速度为500PPS, 轴承的表面温度不超过70° C  
LIFE TEST CONDITION: 2PHASE EXCITING, FULL STEP, AT 500PPS. STARTING PULSE,  
BEARING TEMPERATURE SHOULD BE 70° C MAX.

CONFIRMED&ACCEPTED BY CUSTOMER (客户确认&接受)										
COMPANY CHOP&SIGNATURE (盖章&签名)										
一般公差 TOLERANCE	±0.3/±3°	版本 REV.	年 月 日 DATE	变更番号 ECR NO.	变 更 内 容 REVISIONS		设计 BY	备注 NOTE	REV.	A
设计/DESIGNED		比例 SCALE			型 号/MODEL  57A3-30K				三视图 THIRD ANGL PROJECTION	
		单位 UNIT		mm						
审核/CHECKED		深圳锐特机电技术有限公司							页 SHEET	1/1