
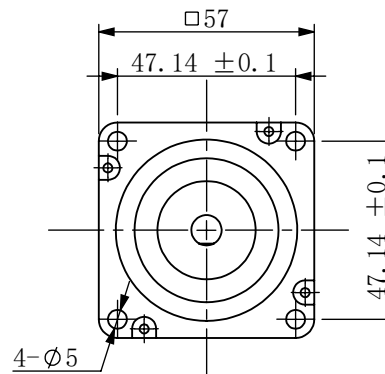


图号/DWG NO.	57HT80-D0821-001
------------	------------------

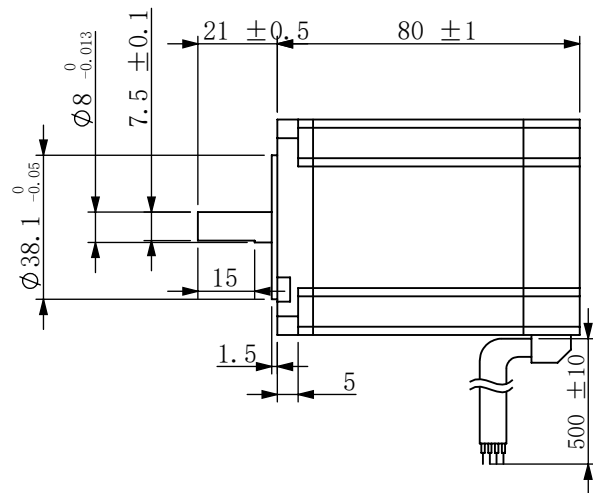

A schematic diagram of a four-terminal motor. It consists of a central circle labeled 'M' representing the motor. To the left of the motor, there are two terminals: the top one is labeled 'A+' and 'RED' (red), and the bottom one is labeled 'A-' and 'BLUE' (blue). To the right of the motor, there are two terminals: the top one is labeled 'B+' and 'GREEN' (green), and the bottom one is labeled 'B-' and 'BLACK' (black). Wavy lines connect the terminals to the motor: a vertical line from A+ to the top of the motor, a vertical line from A- to the bottom of the motor, a horizontal line from B+ to the right side of the motor, and a horizontal line from B- to the right side of the motor.

步 距 角/STEP ANGLE	1.8° ±5%
相 数/NO. OF PHASES	2
额定电压/RATED VOLTAGE	2.05V
额定电流/RATED CURRENT	5.6A
电 阻/RESISTANCE	0.41ohm±10% AT25℃
电 感/INDUCTANCE	2.0mH±20% AT 1kHz, 1Vrms
保持力矩/HOLDING TORQUE	2.4N. m
运行力矩/(AT —PPS) RUNNING TORQUE(AT —PPS)	——以上/MIN (——V. DC, ——A/相(PHASE), ——相励磁/EX)
绝缘耐压/DIELECTRIC STRENGTH	500V A.C 1分钟/MINUTE
绝缘电阻/INSULATION RESISTANCE	100MΩ 以上/MIN.
绝缘等级/INSULATION CLASS	CLASS B
温度上升/TEMPERATURE RISE	80K MAX.
转子惯量/ROTOR INERTIA	460g. cm ²
重 量/WEIGHT	约/APPROX. 1113克/g
允许轴向负载/ALLOWABLE THRUST LOAD	5N
允许径向负载/ALLOWABLE RADIAL LOAD	25N(轴端/ON THE SHAFT END)
运行环境温度/OPERATION AMBIENT TEMP.	-20℃——+50℃
运行环境湿度/OPERATION AMBIENT HUM.	15%——90%

备注(NOTE):


1. 额定电流, 两相同时通电/AT RATED CURRENT, TWO PHASES ON.
2. 热阻法: 电机安装在84*84*15的铝板上, 电机线圈两端通额定电压, OPSS /MEASURED BY RESISTANCE METHOD. MOUNT WITH ALUMINUM HEAT SINK 84*84*15 AT TWO WINDING BE EXCITED BY RATED VOLTAGE, OPSS, 2PHASE ON.
3. 寿命测试条件: 整步, 运行速度为500PPS, 轴承的表面温度不超过70° C
LIFE TEST CONDITION: 2PHASE EXCITING, FULL STEP, AT 500PPS. STARTING PULSE, BEARING TEMPERATURE SHOULD BE 70° C MAX.

励磁顺序(2相励磁)VS. 旋转方向
EXCITING SEQUENCE(TWO PHESES)
VS. DIRECTION OF ROTATION

	STEP	A+	B+	A-	B-	
CW ↓	1	+	+	-	-	↑ CCW
	2	-	+	+	-	
	3	-	-	+	+	
	4	+	-	-	+	

从安装面看为顺时针方向
CLOCKWISE VIEW FROM MOUNTING SIDE

已受控

CONFIRMED&ACCEPTED BY CUSTOMER (客户确认&接受)											
		COMPANY CHOP&SIGNATURE (盖章&签名)									
一般公差 TOLERANCE		±0.3/±3°	版本 REV.	年 月 日 DATE	变更番号 ECR NO.	变 更 内 容 REVISIONS		设计 BY	备注 NOTE	REV.	A
设计/DESIGNED			比例 SCALE			型 号/MODEL 57AM24				三维图 THIRD ANGL PROJECTION	
审核/CHECKED			单位 UNIT		mm					第三角 投影 THIRD ANGLE PROJECTION	
深圳锐特机电技术有限公司									页 SHEET	1/1	