
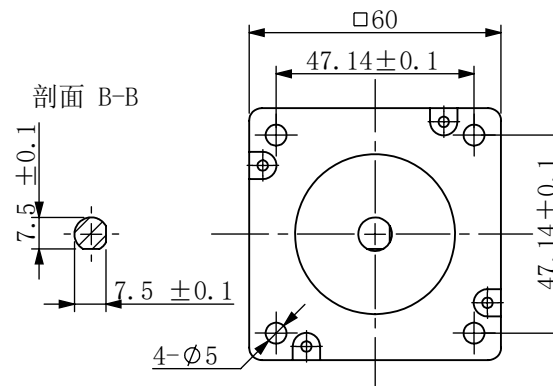


图号/DWG NO.  
D57HS86-DC0828-039

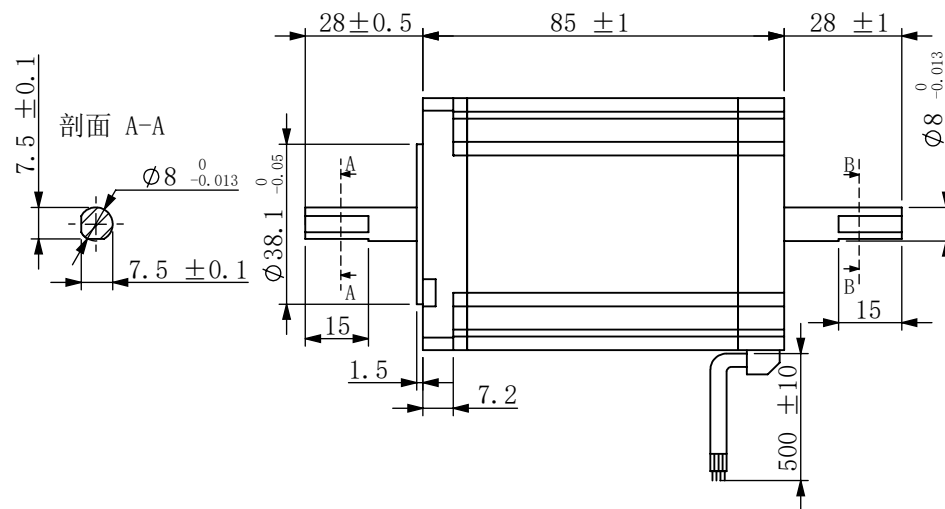

A schematic diagram of a four-terminal device labeled 'M' inside a circle. On the left, there are two input terminals: the top one is labeled '红 A+' (Red A+) and the bottom one is labeled '蓝 A-' (Blue A-). On the right, there are two output terminals: the top one is labeled 'B+ 绿' (B+ Green) and the bottom one is labeled 'B- 黑' (B- Black). The device 'M' is represented by a central circle with wavy lines connecting the input and output terminals.

步 距 角/STEP ANGLE	1.8° ±5%
相 数/NO. OF PHASES	2
额定电压/RATED VOLTAGE	2.5V
额定电流/RATED CURRENT	5.0A
电 阻/RESISTANCE	0.5ohm±10%    AT25℃
电 感/INDUCTANCE	2.22mH±20%    AT 1kHz, 1Vrms
保持力矩/HOLDING TORQUE	3.0N. m
运行力矩/(AT —PPS) RUNNING TORQUE(AT —PPS)	——以上/MIN (——V. DC, ——A/相(PHASE), ——相励磁/EX)
绝缘耐压/DIELECTRIC STRENGTH	500V A.C 1分钟/MINUTE
绝缘电阻/INSULATION RESISTANCE	100MΩ 以上/MIN.
绝缘等级/INSULATION CLASS	CLASS B
温度上升/TEMPERATURE RISE	80K MAX.
转子惯量/ROTOR INERTIA	690g. cm <sup>2</sup>
重 量/WEIGHT	约/APPROX. 1394克/g
允许轴向负载/ALLOWABLE THRUST LOAD	5N
允许径向负载/ALLOWABLE RADIAL LOAD	30N(轴端/ON THE SHAFT END)
运行环境温度/OPERATION AMBIENT TEMP.	-20℃——+50℃
运行环境湿度/OPERATION AMBIENT HUM.	15%——90%

励磁顺序(2相励磁)VS. 旋转方向  
EXCITING SEQUENCE(TWO PHESES)  
VS. DIRECTION OF ROTATION

	STEP	A+	B+	A-	B-
1	+	+	-	-	
2	-	+	+	-	
3	-	-	+	+	
4	+	-	-	+	

从安装面看为顺时针方向  
CLOCKWISE VIEW FROM MOUNTING SIDE

已受控

CONFIRMED&ACCEPTED BY CUSTOMER (客户确认&接受)													
COMPANY CHOP&SIGNATURE (盖章&签名)													
			2022. 07. 20	V1. 1	前后出轴轴长从23mm加长到28mm								
一般公差 TOLERANCE		±0.3/±3°		版本 REV.	年 月 日 DATE	变更番号 ECR NO.	变 更 内 容 REVISIONS		设计 BY	备注 NOTE	REV.	A	
设计/DESIGNED		38 4 10P				比例 SCALE		型 号/MODEL  D57AM30-28-D			三维图 THIRD ANGL PROJECTION		
审核/CHECKED						单位 UNIT	mm				第三角 THIRD ANGL PROJECTION		
深圳锐特机电技术有限公司										页 SHEET	1/1		