

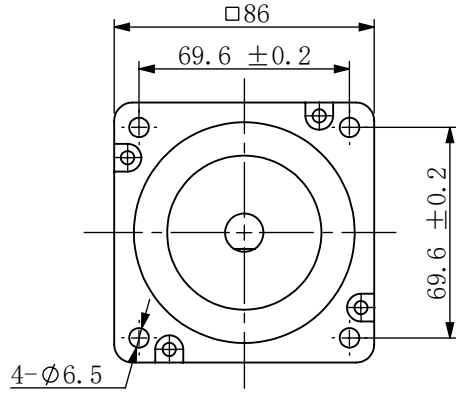


符合RoHS指令要求  
CONFORM TO RoHS INSTRUCTIONS

图号/DWG NO.  
86HS78-D1232-022

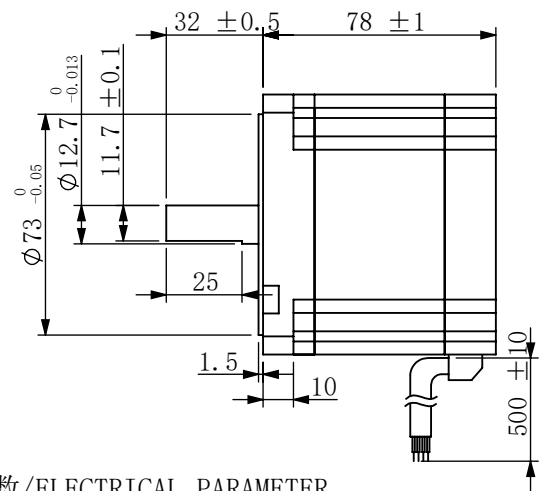

接线图/WIRING DIAGRAM



电机特性参数/ELECTRICAL PARAMETER

|   |  |
|---|--|
| 步 距 角/STEP ANGLE                          | 1.8° ±5%                                     |
| 相 数/NO. OF PHASES                         | 2  |
| 额定电压/RATED VOLTAGE                        | 2.46V  |
| 额定电流/RATED CURRENT                        | 6.0A   |
| 电 阻/RESISTANCE                            | 0.41ohm±10% AT25℃                            |
| 电 感/INDUCTANCE                            | 2.82mH±20% AT 1kHz, 1Vrms                    |
| 保持力矩/HOLDING TORQUE                       | 4.5N.m                                       |
| 运行力矩/(AT —PPS)<br>RUNNING TORQUE(AT —PPS) | ——以上/MIN<br>(——V.DC, ——A/相(PHASE), ——相励磁/EX) |
| 绝缘耐压/DIELECTRIC STRENGTH                  | 500V A.C 1分钟/MINUTE                          |
| 绝缘电阻/INSULATION RESISTANCE                | 100MΩ 以上/MIN.                                |
| 绝缘等级/INSULATION CLASS                     | CLASS B                                      |
| 温度上升/TEMPERATURE RISE                     | 80K MAX.                                     |
| 转子惯量/ROTOR INERTIA                        | 1400g.cm <sup>2</sup>                        |
| 重 量/WEIGHT                                | 约/APPROX. 2250克/g                            |
| 允许轴向负载/ALLOWABLE THRUST LOAD              | 10N  |
| 允许径向负载/ALLOWABLE RADIAL LOAD              | 100N(轴端/ON THE SHAFT END)                    |
| 运行环境温度/OPERATION AMBIENT TEMP.            | -20℃——+50℃                                   |
| 运行环境湿度/OPERATION AMBIENT HUM.             | 15%——90%                                     |
| 寿 命/LIFE                                  | 5000小时/HOURS                                 |

励磁顺序(2相励磁)VS. 旋转方向  
EXCITING SEQUENCE(TWO PHESES)  
VS. DIRECTION OF ROTATION

|    |      |    |    |    |    |     |
|----|------|----|----|----|----|-----|
|    | STEP | A+ | B+ | A- | B- |     |
| CW | 1    | +  | +  | -  | -  | CCW |
|    | 2    | -  | +  | +  | -  |     |
|    | 3    | -  | -  | +  | +  |     |
|    | 4    | +  | -  | -  | +  |     |

从安装面看为顺时针方向  
CLOCKWISE VIEW FROM MOUTING SIDE

已受控

备注(NOTE):  
1. 额定电流, 两相同时通电/AT RATED CURRENT, TWO PHASES ON.  
2. 热阻法: 电机安装在84\*84\*T5的铝板上, 电机线圈两端通额定电压, OPPS /MEASURED BY RESISTANCE METHOD. MOUNT WITH ALUMINUM HEAT SINK 84\*84\*T5 AT TWO WINDING BE EXCITED BY RATED VOLTAGE, OPPS, 2PHASE ON.  
3. 寿命测试条件: 整步, 运行速度为500PPS, 轴承的表面温度不超过70° C  
LIFE TEST CONDITION: 2PHASE EXCITING, FULL STEP, AT 500PPS. STARTING PULSE, BEARING TEMPERATURE SHOULD BE 70° C MAX.

|  |          |             |               |                 |                      |          |            |                                  |     |
|--|----------|-------------|---------------|-----------------|----------------------|----------|------------|----------------------------------|-----|
| CONFIRMED&ACCEPTED BY COTUMER<br>(客户确认&接受) |          |             |               |                 |                      |          |            |                                  |     |
| COMPANY CHOP&SIGNATURE<br>(盖章&签名)          |          |             |               |                 |                      |          |            |                                  |     |
| 一般公差<br>TULERANCE                          | ±0.3/±3° | 版本<br>REV.  | 年 月 日<br>DATE | 变更番号<br>ECR NO. | 变 更 内 容<br>REVISIONS | 设计<br>BY | 备注 NOTE    | REV.                             | A   |
| 设计/DESIGNED                                |          | 比例<br>SCALE |               | 型 号/MODEL       |                      |          |            | 三维图<br>THIRD ANGLE<br>PROJECTION |     |
| 审核/CHECKED                                 |          | 单位<br>UNIT  | mm            |                 |                      |          |            |                                  |     |
|  |          |             |               |                 |                      |          | 页<br>SHEET |                                  | 1/1 |