




符合RoHS指令要求
CONFORM TO RoHS INSTRUCTIONS

图号/DWG NO.
86HSM78T-K1440-024


剖面 A-A



键: 5*5*25

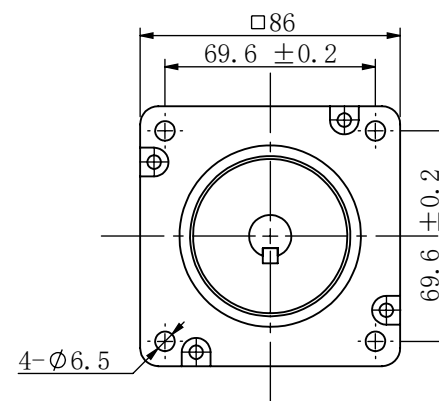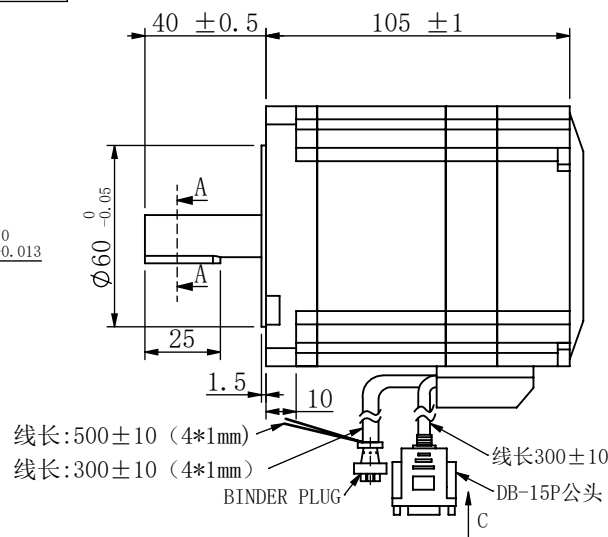

接线图/WIRING DIAGRAM




BINDER PLUG:

电机特性参数/ELECTRICAL PARAMETER

步距角/STEP ANGLE	1.8° ± 5%
相数/NO. OF PHASES	2
额定电压/RATED VOLTAGE	1.98V
额定电流/RATED CURRENT	6.0A
电阻/RESISTANCE	0.33ohm ± 10% AT 25°C
电感/INDUCTANCE	2.95mH ± 20% AT 1kHz, 1Vrms
保持力矩/HOLDING TORQUE	4.5N.m
运行力矩/(AT —PPS) RUNNING TORQUE (AT —PPS)	——以上/MIN (——V.DC, ——A/相(PHASE), ——相励磁/EX)
绝缘耐压/DIELECTRIC STRENGTH	500V A.C 1分钟/MINUTE
绝缘电阻/INSULATION RESISTANCE	100MΩ 以上/MIN.
绝缘等级/INSULATION CLASS	CLASS B
温度上升/TEMPERATURE RISE	80K MAX.
转子惯量/ROTOR INERTIA	1400g.cm²
重量/WEIGHT	约/APPROX. 2460克/g
允许轴向负载/ALLOWABLE THRUST LOAD	10N
允许径向负载/ALLOWABLE RADIAL LOAD	100N(轴端/ON THE SHAFT END)
运行环境温度/OPERATION AMBIENT TEMP.	-20°C——+50°C
运行环境湿度/OPERATION AMBIENT HUM.	15%——90%

Pin	1	2	3	4	5	6
Definition	A+	A-	B+	B-	NC	NC
Color	RED	BLUE	GREEN	BLACK	BLACK	BLACK



励磁顺序(2相励磁)VS. 旋转方向
EXCITATION SEQUENCE(TWO PHASES)
VS. DIRECTION OF ROTATION

STEP	A+	B+	A-	B-
1	+	+	-	-
2	-	+	+	-
3	-	-	+	+
4	+	-	-	+

从安装面看为顺时针方向
CLOCKWISE VIEW FROM MOUNTING SIDE

1000线光电编码器出线定义							
Pin	1	2	3	6	11	12	13
Definition	EA+	VCC	GND	PE	EB+	EB-	EA-
Color	BROWN	RED	BLUE		GREEN	YELLOW	WHITE

CONFIRMED&ACCEPTED BY CUSTOMER (客户确认&接受)										
		COMPANY CHOP&SIGNATURE (盖章&签名)								
一般公差 TOLERANCE		±0.3/±3°	版本 REV.	年 月 日 DATE	变更番号 ECR NO.	变 更 内 容 REVISIONS	设计 BY	备注 NOTE	REV.	A
设计/DESIGNED				比例 SCALE		型 号/MODEL 86AM45ED-HG				
审核/CHECKED					单位 UNIT					mm
深圳锐特机电技术有限公司										页 SHEET

备注/NOTE):
1. 额定电流, 两相同时通电/AT RATED CURRENT, TWO PHASES ON.
2. 热阻法: 电机安装在84*84*T5的铝板上, 电机线圈两端通额定电压, OPPS /MEASURED BY RESISTANCE METHOD. MOUNT WITH ALUMINUM HEAT SINK 84*84*T5 AT TWO WINDING BE EXCITED BY RATED VOLTAGE, OPPS, 2PHASE ON.
3. 寿命测试条件: 整步, 运行速度为500PPS, 轴承的表面温度不超过70° C LIFE TEST CONDITION: 2PHASE EXCITING, FULL STEP, AT 500PPS. STARTING PULSE, BEARING TEMPERATURE SHOULD BE 70° C MAX.