

图号/DWG NO.
86HSM112D-K1440-BZ

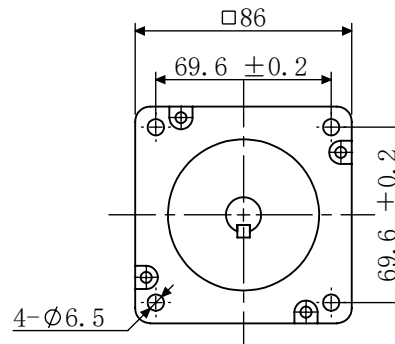



Diagram of a three-phase motor (M) with three windings. The top winding is connected to 'Red' (A+) and 'Blue' (A-). The bottom winding is connected to 'Green' (B+) and 'Black' (B-). The third winding is not connected to any terminal.

1000线光电编码器出线定义									
序号	1	2	3	4	5	6	7	8	9
定义	EA+	EA-	NC	EB+	EB-	NC	NC	5V	GN
线色	棕	白	\	绿	黄	\	\	红	蓝

电压	24V DC
脱力扭矩	5.5N·M
功率	4.3W
最高转速	1K RPM
响应时间	50ms
绝缘等级	CLASS B
黑色	负极
红色	正极

	STEP	A+	B+	A-	B-
1	+	+	-	-	
2	-	+	+	-	
3	-	-	+	+	
4	+	-	-	+	

已受控

CONFIRMED&ACCEPTED BY CUSTOMER (客户确认&接受)												
		COMPANY CHOP&SIGNATURE (盖章&签名)										
一般公差 TOLERANCE		±0.3/±3°		版本 REV.	年 月 日 DATE	变更番号 ECR NO.	变 更 内 容 REVISIONS	设计 BY	备注 NOTE	REV.	A	
设计/DESIGNED	36 4 100	比例 SCALE			型 号/MODEL 86AM85ED-Z2	三维图 THIRD ANGLE PROJECTION 						
		单位 UNIT		mm								
审核/CHECKED				深圳锐特机电技术有限公司							页 SHEET	1/1