

图号/DWG NO.	57HS102-D0821-BZ
------------	------------------

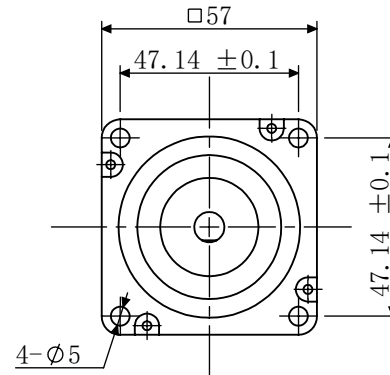


Diagram of the motor's terminal box. It shows four terminals arranged in a square. The top-left terminal is labeled 'A+' and 'RED'. The top-right terminal is labeled 'A-' and 'BLUE'. The bottom-left terminal is labeled 'B+' and 'GREEN'. The bottom-right terminal is labeled 'B-' and 'BLACK'. A motor symbol, represented by a circle with an 'M' inside, is connected between the A+ and B+ terminals.


励磁顺序(2相励磁)VS. 旋转方向
EXCITING SEQUENCE(TWO PHESES)
VS. DIRECTION OF ROTATION

刹车技术参数/BRAKE TECHNICAL PARAMETER

电压	24V DC
脱力扭矩	2. 2N • M
功率	4. 5W
最高转速	1K RPM
响应时间	50ms
绝缘等级	CLASS B
黑色	负极
红色	正极

STEP	A+	B+	A-	B-
1	+	+	-	-
2	-	+	+	-
3	-	-	+	+
4	+	-	-	+

从安装面看为顺时针方向
CLOCKWISE VIEW FROM MOUNTING SIDE

CONFIRMED&ACCEPTED BY CUSTOMER (客户确认&接受)									
COMPANY CHOP&SIGNATURE (盖章&签名)									
一般公差 TOLERANCE	±0.3/±3°	版本 REV.	年 月 日 DATE	变更番号 ECR NO.	变 更 内 容 REVISIONS	设计 BY	备注 NOTE	REV.	A
设计/DESIGNED		比例 SCALE			型 号/MODEL 57A3-Z2	 三维图 THIRD ANGLE PROJECTION			
		单位 UNIT	mm						
审核/CHECKED		深圳锐特机电技术有限公司							页 SHEET